



## Submittal Data Sheet

0.75-Ton Floor Standing Unit

FXLQ09MVJU9

### FEATURES

- One of our slimmest indoor units (less than 8") fits any interior design
- Wide air discharge outlet distributes a comfortable airflow throughout the entire space
- Silent stream fan technology keeps sound pressure levels low
- Ideal for installation beneath a window
- Unit requires minimal installation space
- Standard Limited Warranty: 10-year warranty on compressor and all parts





## Submittal Data Sheet

0.75-Ton Floor Standing Unit

FXLQ09MVJU9

### PERFORMANCE

Indoor Unit Model No.	FXLQ09MVJU9	Indoor Unit Name:	0.75-Ton Floor Standing Unit
Type:	Floor Standing	Rated Cooling Conditions:	Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75
Rated Cooling Capacity (Btu/hr):	9,500	Rated Heating Conditions:	Indoor (°F DB/WB): 70 / 70 Ambient (°F DB/WB): 47 / 43
Sensible Capacity (Btu/hr):	7,100	Rated Piping Length(ft):	
Cooling Input Power (kW):	0.050	Rated Height Separation (ft):	
Rated Heating Capacity (Btu/hr):	10,500		
Heating Input Power (kW):	0.05		




### INDOOR UNIT DETAILS

Power Supply (V/Hz/Ph):	208-230 / 60 / 1	Airflow Rate (H/L) (CFM):	245/210
Power Supply Connections:	L1, L2, Ground	Moisture Removal (Gal/hr):	
Min. Circuit Amps MCA (A):	0.30	Gas Pipe Connection (inch):	1/2
Max Overcurrent Protection (MOP) (A):	15.00	Liquid Pipe Connection (inch):	1/4
Dimensions (HxWxD) (in):	23-5/8 x 39-3/8 x 8-3/4	Condensate Connection (inch):	25/32
Panel (HxWxD) (in):		Sound Pressure (H/L) (dBA):	35/32
Net Weight (lb):	58	Sound Power Level (dBA):	
Panel Weight (lb):		Ext. Static Pressure (Rated/Max) (inWg):	0.00 / 0.00

**Submittal Data Sheet**  
 0.75-Ton Floor Standing Unit  
 FXLQ09MVJU9

**DIMENSIONAL DRAWING**

(Unit : in.(mm))

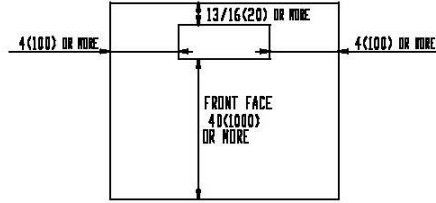

REQUIRED INSTALLATION SPACE

