



Submittal Data Sheet

1.0-Ton Multi Position Air Handling Unit

FXTQ12TAVJUA

FEATURES

- Capable of upflow, horizontal-right, horizontal-left, and downflow installation. Downflow installation requires the use of a field installed downflow accessory kit.
- Variable speed ECM motor produces nominal CFM up to 0.9" external static pressure
- Improved auxiliary heat logic
- Designed with less than 2% air leakage when tested in accordance with ASHRAE 193
- All-aluminum coil
- Precise refrigerant modulation from a 2000 pulse electric expansion valve
- Cool, Dry, Auto, Heat, and Fan operation modes
- Auto Fan Speed automatically adjusts fan speed in relation to space temperature and set point
- Configurable Dry mode
- Optional slide-in electric heat available up to 6 kW

BENEFITS

- Optimized fan speed from Auto Fan Speed logic
- Reduced auxiliary heat dead band
- Configurable electric heat on/off temperature settings
- Compact footprint fits tight spaces



VRV





Submittal Data Sheet

1.0-Ton Multi Position Air Handling Unit

FXTQ12TAVJUA

PERFORMANCE


| | | | |
|----------------------------------|--------------|-------------------------------|---|
| Indoor Unit Model No. | FXTQ12TAVJUA | Indoor Unit Name: | 1.0-Ton Multi Position Air Handling Unit |
| Type: | Ducted | Rated Cooling Conditions: | Indoor (°F DB/WB): 80 / 67 Ambient (°F DB/WB): 95 / 75 |
| Rated Cooling Capacity (Btu/hr): | 12,000 | Rated Heating Conditions: | Indoor (°F DB/WB): 70 / Ambient (°F DB/WB): 47 / 43 |
| Sensible Capacity (Btu/hr): | 9,900 | Rated Piping Length(ft): | |
| Cooling Input Power (kW): | 0.150 | Rated Height Separation (ft): | |
| Rated Heating Capacity (Btu/hr): | 13,500 | | |
| Heating Input Power (kW): | 0.15 | | |

INDOOR UNIT DETAILS

| | | | |
|---------------------------------------|------------------|--|-------------|
| Power Supply (V/Hz/Ph): | 208-230 / 60 / 1 | Airflow Rate (H/M/L) (CFM): | 400/340/280 |
| Power Supply Connections: | | Moisture Removal (Gal/hr): | |
| Min. Circuit Amps MCA (A): | 4.90 | Gas Pipe Connection (inch): | 1/2 |
| Max Overcurrent Protection (MOP) (A): | 15.00 | Liquid Pipe Connection (inch): | 1/4 |
| Dimensions (HxWxD) (in): | 45 x 17.5 x 21 | Condensate Connection (inch): | 3/4 |
| Panel (HxWxD) (in): | | Sound Pressure (H) (dBA): | 36 |
| Net Weight (lb): | | Sound Power Level (dBA): | 45 |
| Panel Weight (lb): | | Ext. Static Pressure (Rated/Max) (inWg): | 0.90 / 0.90 |

Submittal Data Sheet
 1.0-Ton Multi Position Air Handling Unit
 FXTQ12TAVJUA

DIMENSIONAL DRAWING

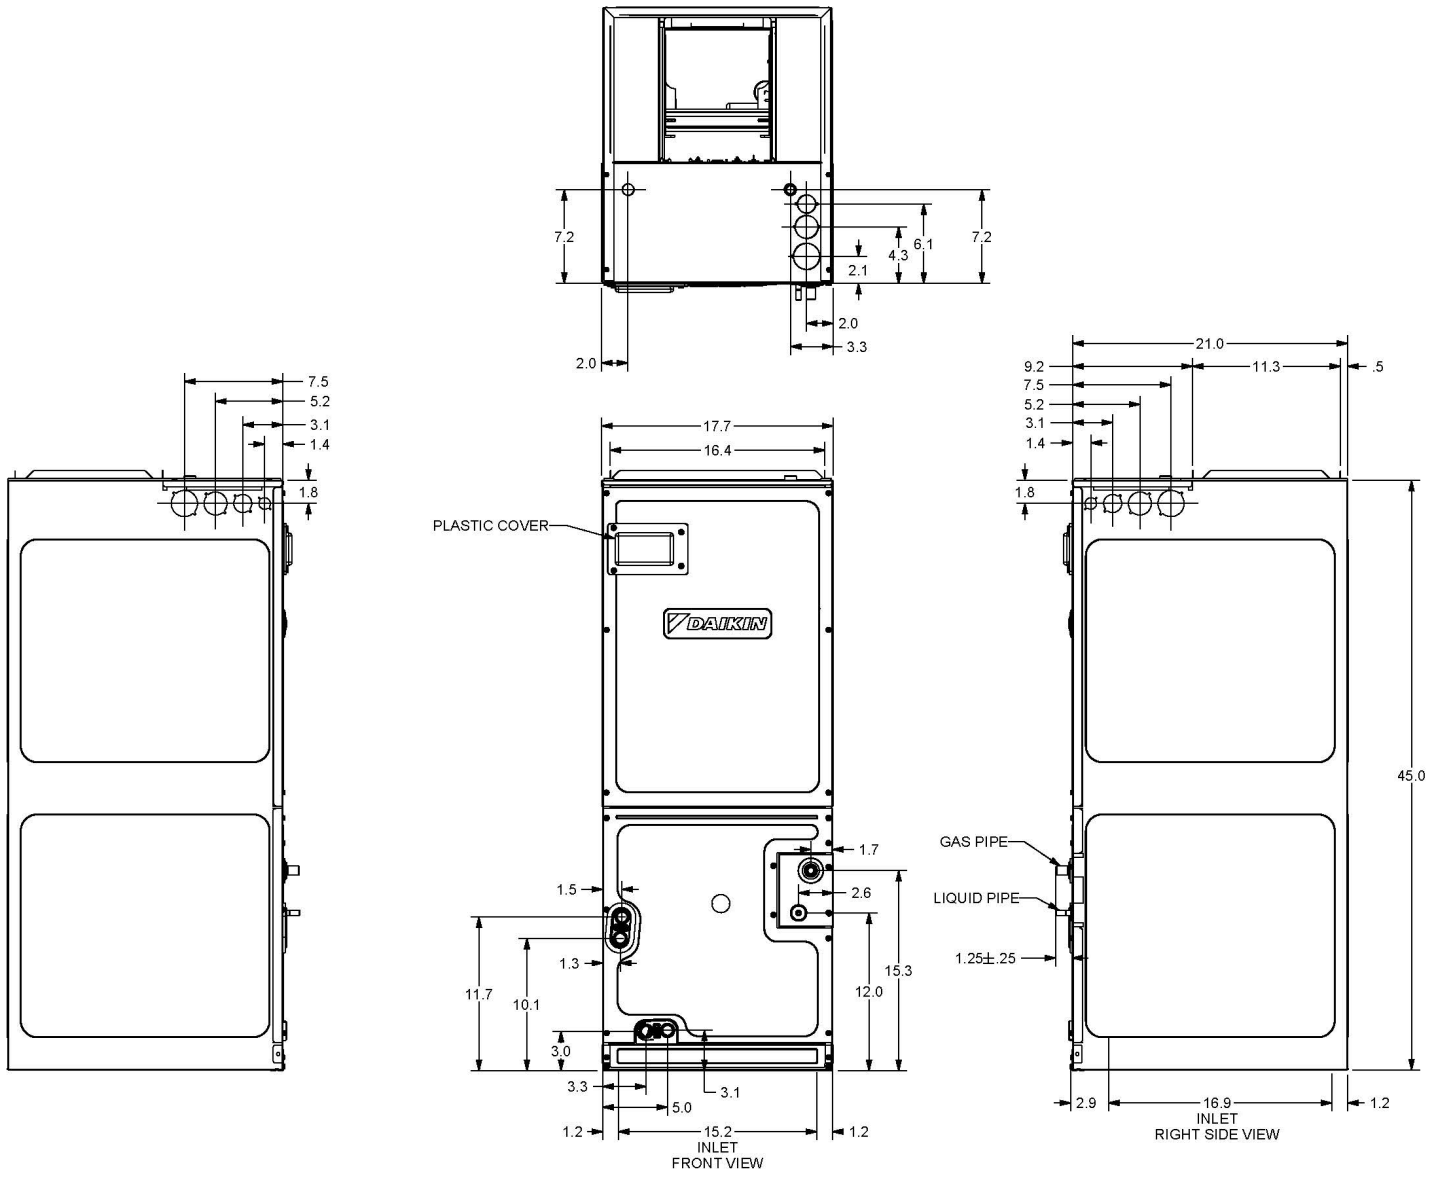

FXTQ09/12/18/24/30/36 TAVJU